



FP300

Application

- Suitable for most single and double action doors including automatic doors
- Roller system finger protection
- For glass doors

Description

- Provides effective protection against fingers being accidentally trapped on the hinge side of the door
- Special model for fitting to glass doors

Technical Data

Roller system specifications:

- Cycle tested to 1,000,000 operations
- Maximum length: 2500mm
- Standard length: 1925mm
- Minimum length: 325mm
- Maximum fabric travel: 260mm
- Mounted with acrylate-foam high performance tape




Fabric colour



Black


Housing finish options




Satin Anodised Aluminium (SAA)

RAL colour match available on request (POA). Please contact us to enquire.

Application

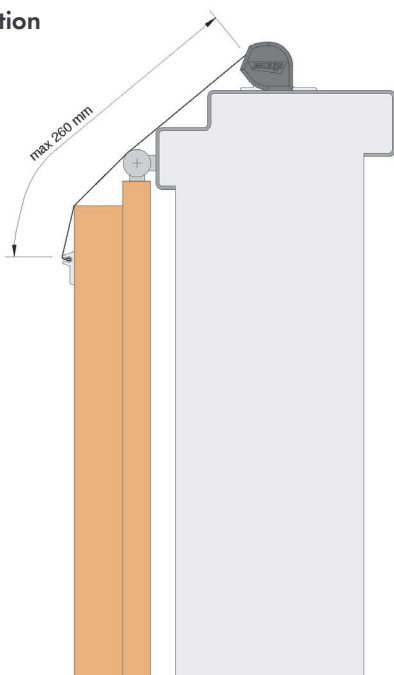

Dimensions

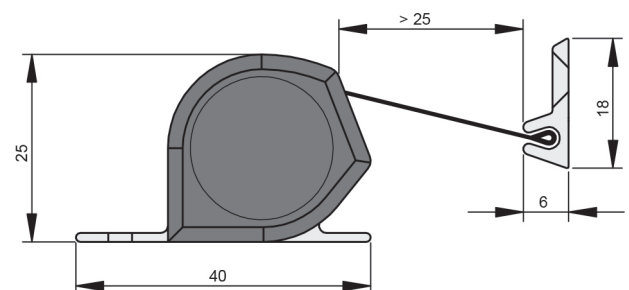

Awarded German Safety Mark and certified to EN16654

