

# FINGER PROTECTION DEVICES

## FP400

### Application

- Suitable for most single and double action doors including automatic doors
- Roller system finger protection.

### Description


- Provides effective protection against fingers being accidentally trapped on the hinge side of the door
- Strong fire retardant fabric material is kept under constant tension and is designed to cover the gap between the door and frame automatically when the door is opened
- The housing is designed to conceal screws when in the closed position
- Features an easy clean aluminium housing
- Standard finishes: Satin Anodised Aluminium (SAA), White (EPW) or Dark Bronze (DB) with black fabric. Other options detailed below to special order

### Technical Data

#### Roller system specifications:

- Cycle tested to 1,000,000 operations
- Maximum length: 2500mm
- Standard length: 1925mm
- Minimum length: 325mm
- Maximum fabric travel: 260mm
- Suitable for use on 60min fire doors
- Class 2 - BS 8613:2017 Finger Protection for Pedestrian Doors
- EN16654:2015 Child Protection Products

#### Fabric finishes for the FP400

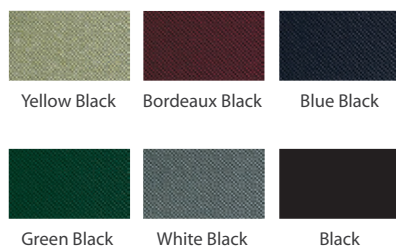

#### Housing finish options for the FP400




RAL colour match available on request. Please contact us to enquire.



#### Roller system specification: FP400 XL

- Designed for situations where a wider gap needs to be covered.
- Fabric only available in black
- Fabric extension length: 320mm
- Maximum length: 2500mm
- Standard length: 1925mm
- Minimum length: 325mm

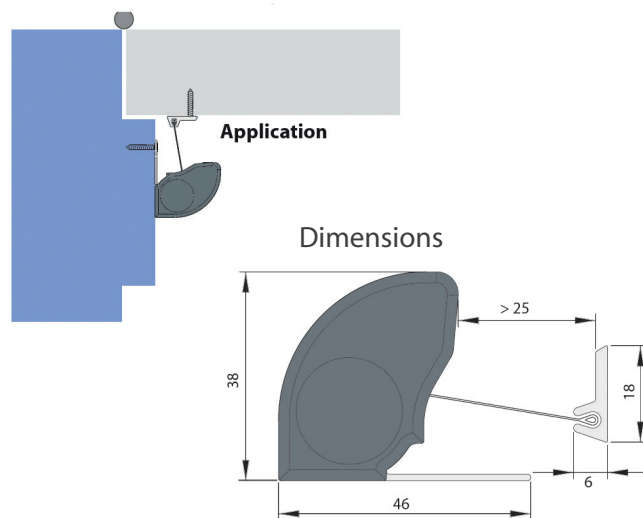

Awarded German Safety Mark and certified to EN16654

