

FINGER PROTECTION

FP800

Application

- Suitable for most single and double action doors including automatic doors
- Roller system finger protection
- Weather resistant for external use but can be used internally

Description

- Provides effective protection against fingers being accidentally trapped on the hinge side of doors
- Weather-proof: Resistant to: rain, snow, frost, foliage, dirt and UV light
Temperature range: -20 to +50 °C
- Robust Housing with increased wall thickness for extra durability
- Surface is wipeable and easy to clean
- Suitable for sterile environments as can be steam cleaned
- Concealed fixings
- Suitable for retrofitting

Technical Data

Roller system specifications:

- Cycle tested to 200,000 operations
- Maximum length: 2500mm
- Standard length: 1925mm
- Minimum length: 325mm
- Maximum fabric travel: 260mm



Fabric colour



Anthracite Grey (RAL 7016)


Housing colour




Satin Anodised Aluminium (SAA)

Other Anodised/RAL colours available.

Application

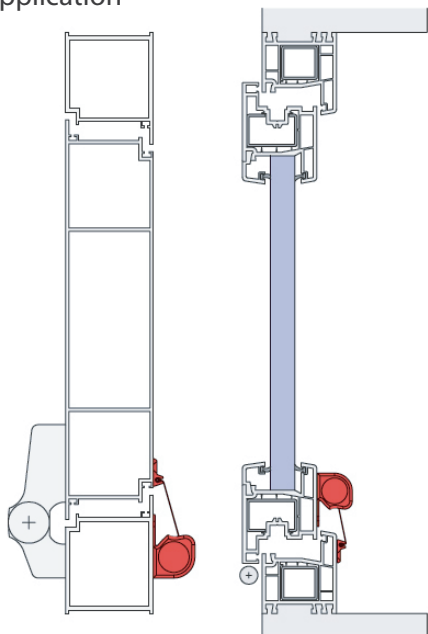

Dimensions

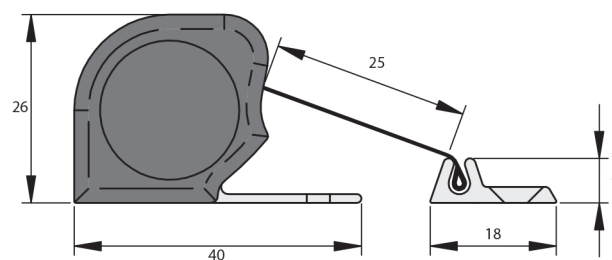

Awarded German Safety Mark and certified to EN16654

