

■ K5030-3 (AR602CF)

duraplus®

HOPPE nylon straight concealed fix pull handle:

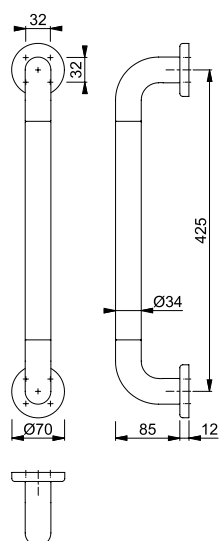
- 34 mm diameter
- For 425 and 600 mm, pull handle contains a modular feature consisting of 3 parts



| Article description | Ø | Distance | F1004 | F3003 | F3005 | F5002 | P.U. | O.C. |
|------------------------------|----|----------|-----------------|-------------|-------------|-------------|------|------|
| | | | Article no. | Article no. | Article no. | Article no. | | |
| Straight pull handle on rose | 34 | 220 | 8550708 | 8550715 | 8550687 | 8550722 | 1 | 5 |
| | 34 | 300 | 8550939 | 8550946 | 8550918 | 8550953 | 1 | 5 |
| | 34 | 425 | 87109327 | 87109317 | 87109317 | 87109318 | 1 | 5 |
| | 34 | 600 | 87109360 | 87109357 | 87109350 | 87109351 | 1 | 5 |

| Article description | Ø | Distance | F5003 | F6016 | F7016 | F7506 | P.U. | O.C. |
|------------------------------|----|----------|-------------|-------------|-------------|-------------|------|------|
| | | | Article no. | Article no. | Article no. | Article no. | | |
| Straight pull handle on rose | 34 | 220 | 8550729 | 8550673 | 87133117 | 8550736 | 1 | 5 |
| | 34 | 300 | 8550960 | 8550904 | 87133110 | 8550967 | 1 | 5 |
| | 34 | 425 | 87109323 | 87109324 | 87133145 | 87109319 | 1 | 5 |
| | 34 | 600 | 87109356 | 87109359 | 87133172 | 87109352 | 1 | 5 |


| Article description | Ø | Distance | F9016 | F9017 | | | P.U. | O.C. |
|------------------------------|----|----------|-------------|-------------|--|--|------|------|
| | | | Article no. | Article no. | | | | |
| Straight pull handle on rose | 34 | 220 | 8550743 | 8550680 | | | 1 | 5 |
| | 34 | 300 | 8550974 | 8550911 | | | 1 | 5 |
| | 34 | 425 | 87109320 | 87109321 | | | 1 | 5 |
| | 34 | 600 | 87109353 | 87109354 | | | 1 | 5 |



Included in a successful fire test to BS EN1634 Part-1. Assessed for use on 30 and 60 minute timber fire doors


■ **K5030-3 (AR602BF)**


duraplus®




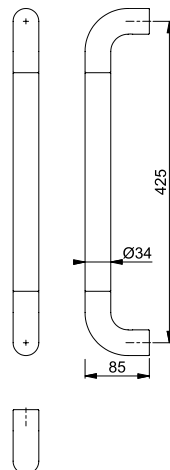
HOPPE nylon straight bolt through fixing pull handle pair:

- 34 mm diameter
- For 425 and 600 mm, pull handle contains a modular feature consisting of 3 parts

| Article description | Ø |  | Distance | F1004 | F3003 | F3005 | F5002 | P.U. | O.C. |
|---|----|---|----------|-------------|-----------------|-------------|-------------|------|------|
| | | | | Article no. | Article no. | Article no. | Article no. | | |
| Straight pull handle, bolt through fixing | 34 | 40-50 | 220 | 8550785 | 8550792 | 8550764 | 8550799 | 1 | 5 |
| | 34 | 40-50 | 300 | 8551016 | 8551023 | 8550995 | 8551030 | 1 | 5 |
| | 34 | 40-50 | 425 | 87109316 | 87109313 | 87109306 | 87109307 | 1 | 5 |
| | 34 | 40-50 | 600 | 87109349 | 87109346 | 87109339 | 87109340 | 1 | 5 |

| Article description | Ø |  | Distance | F5003 | F6016 | F7016 | F7506 | P.U. | O.C. |
|---|----|---|----------|-------------|-------------|-------------|-------------|------|------|
| | | | | Article no. | Article no. | Article no. | Article no. | | |
| Straight pull handle, bolt through fixing | 34 | 40-50 | 220 | 8550806 | 8550750 | 11500773 | 8550813 | 1 | 5 |
| | 34 | 40-50 | 300 | 8551037 | 8550981 | 87133124 | 8551044 | 1 | 5 |
| | 34 | 40-50 | 425 | 87109312 | 87109315 | 87133152 | 87109308 | 1 | 5 |
| | 34 | 40-50 | 600 | 87109345 | 87109348 | 87133166 | 87109341 | 1 | 5 |

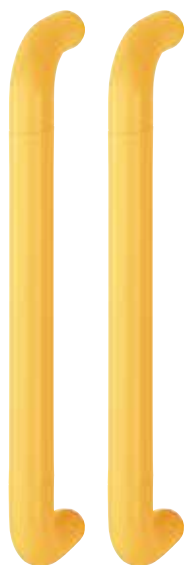
| Article description | Ø |  | Distance | F9016 | F9017 | | | P.U. | O.C. |
|---|----|---|----------|-------------|-------------|--|--|------|------|
| | | | | Article no. | Article no. | | | | |
| Straight pull handle, bolt through fixing | 34 | 40-50 | 220 | 8550820 | 8550757 | | | 1 | 5 |
| | 34 | 40-50 | 300 | 8551051 | 8550988 | | | 1 | 5 |
| | 34 | 40-50 | 425 | 87109309 | 87109310 | | | 1 | 5 |
| | 34 | 40-50 | 600 | 87109342 | 87109343 | | | 1 | 5 |



Included in a successful fire test to BS EN1634 Part-1. Assessed for use on 30 and 60 minute timber fire doors


■ K5030-3 (AR602BB)


duraplus®




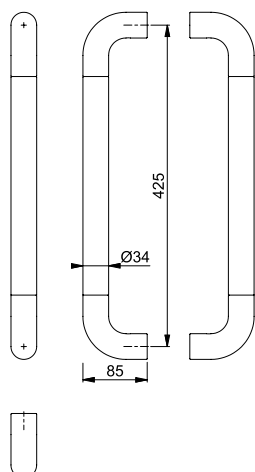
HOPPE nylon straight back to back fixing pull handle pair:

- 34 mm diameter
- For 425 and 600 mm, pull handle contains a modular feature consisting of 3 parts

| Article description | Ø |  | Distance | F1004 | F3003 | F3005 | F5002 | P.U. | O.C. |
|---|----|---|----------|-----------------|-------------|-------------|-------------|------|------|
| | | | | Article no. | Article no. | Article no. | Article no. | | |
| Straight pull handles, back to back fixing pair | 34 | 40-50 | 220 | 8550631 | 11566097 | 11566103 | 8550645 | 1 | 5 |
| | 34 | 40-50 | 300 | 8550862 | 8550869 | 8550841 | 8550876 | 1 | 5 |
| | 34 | 40-50 | 425 | 87109338 | 87109335 | 87109328 | 87109329 | 1 | 5 |
| | 34 | 40-50 | 600 | 87109371 | 11508413 | 87109361 | 87109362 | 1 | 5 |

| Article description | Ø |  | Distance | F5003 | F6016 | F7016 | F7506 | P.U. | O.C. |
|---|----|---|----------|-------------|-------------|-------------|-------------|------|------|
| | | | | Article no. | Article no. | Article no. | Article no. | | |
| Straight pull handles, back to back fixing pair | 34 | 40-50 | 220 | 8550652 | 8550596 | 87133096 | 8550659 | 1 | 5 |
| | 34 | 40-50 | 300 | 8550883 | 8550827 | 87133103 | 8550890 | 1 | 5 |
| | 34 | 40-50 | 425 | 87109334 | 87109337 | 87133159 | 87109330 | 1 | 5 |
| | 34 | 40-50 | 600 | 87109367 | 87109370 | 87133179 | 87109363 | 1 | 5 |

| Article description | Ø |  | Distance | F9016 | F9017 | | | P.U. | O.C. |
|---|----|---|----------|-------------|-------------|--|--|------|------|
| | | | | Article no. | Article no. | | | | |
| Straight pull handles, back to back fixing pair | 34 | 40-50 | 220 | 8550666 | 8550603 | | | 1 | 5 |
| | 34 | 40-50 | 300 | 8550897 | 8550834 | | | 1 | 5 |
| | 34 | 40-50 | 425 | 87109331 | 87109332 | | | 1 | 5 |
| | 34 | 40-50 | 600 | 87109364 | 87109365 | | | 1 | 5 |



Included in a successful fire test to BS EN1634 Part-1. Assessed for use on 30 and 60 minute timber fire doors